


# SLIDE DOOR OPENER

## REMOTE SLIDE DOOR OPERATOR FOR RESIDENTIAL & MODERATE COMMERCIAL USE MODEL: DS3002

### SPECIFICATION

- Suitable for door upto 2mtr opening. Gate Weight Max. 80kg (one Leaf)
- Working temp -20 to +60. (for Indoor Use ofly)
- Standard opening time to upto 20 sec per meter (Adjustable)
- Remote control operating distance 10 to 50 feet. (Optional)
- The Kit weights 10Kg Apx.
- Over-load and overheat protecting function.
- The above kit comes with a full 1 year Warranty and free technical help. CE tests passed

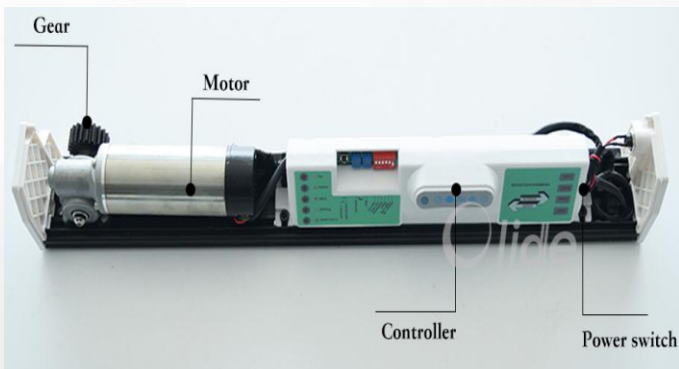

### FEATURES:

1. Open and close door by remote/ PIR/Access card etc.
2. Can be integrated with most of access control system (RFID, Biometric etc)
3. Can be paired with upto 50 remote to operate the swing gate operator
4. Safely 12volts DC motors eliminating the dangers of electric shock hazard.
5. Obstruction sensor provide instant stop upon contact with obstacle(optional)
6. Can work on your existing home Inverted / UPS
7. Remote control transmitter and receiver with code encryption technology.
8. Soft start and stop.
9. The System is installed above the door, existing door too can install






**1**  
YEAR  
WARRANTY



AdvanceProTec  
AN ISO 9001: 2008 COMPANY

**CALL OR EMAIL US TODAY**

# OPERATION MODES

-  Automatically door will open when a sensor is triggered and close after the preset dwell time has lapsed
-  Hold open mode: the door will open and remain open until another mode is selected
-  Lock Mode: Door will close and remain closed until another model is selected
-  Pet mode: For the use with pet sensor and when a pet is detected the door will only open for pet width as set and close after set time
-  Manual Mode: the door can be manually operated the system will not drive the door

## KIT WILL INCLUDE

- 1 Slide door motor & inbuilt controller
- 2 Nos remote
- 2 Racks 50cm each
- 1 Wireless push button

## OPTIONAL ACCESSORIES

GSM GATE OPENER 	Beam Sensor 
Motion Sensor 	TIME CONTROLLED AUTO CLOSE MODE 
Wireless Push Button 	PASSWORD CONTROLLED ACCESS 

Many More to Choose From..

## TECHNICAL DETAILS

Technical Data	Description
Driving Method	Electro-Mechanical geared motor
Operating Voltage	DC 2V for Normal Speed DC 6V For ending Speed
Product Size	490mm(L)X72mm(W)X63mm(H)
Load Capacity	80 Kg 5 Meters
Opening Time	2 -20 Sec per meter (adjustable)
Opening Speed	15-45 cm / Sec
Closing Speed	10- 43 cm / Sec
Current	1 Amp
Motor Power	55W
Standby power	Micro-Processor based
Temperature	0 to 50°C
Colour	Black / White
Manual Operation	Yes
Max length of gate	2 meters per wing



DC MOTOR



ACCESS CONTROL



AdvanceProTec



advanceprotec.com